


CARGOGLIDE®



CARGOGLIDE
SLIDE OUT
TRUCK TRAYS

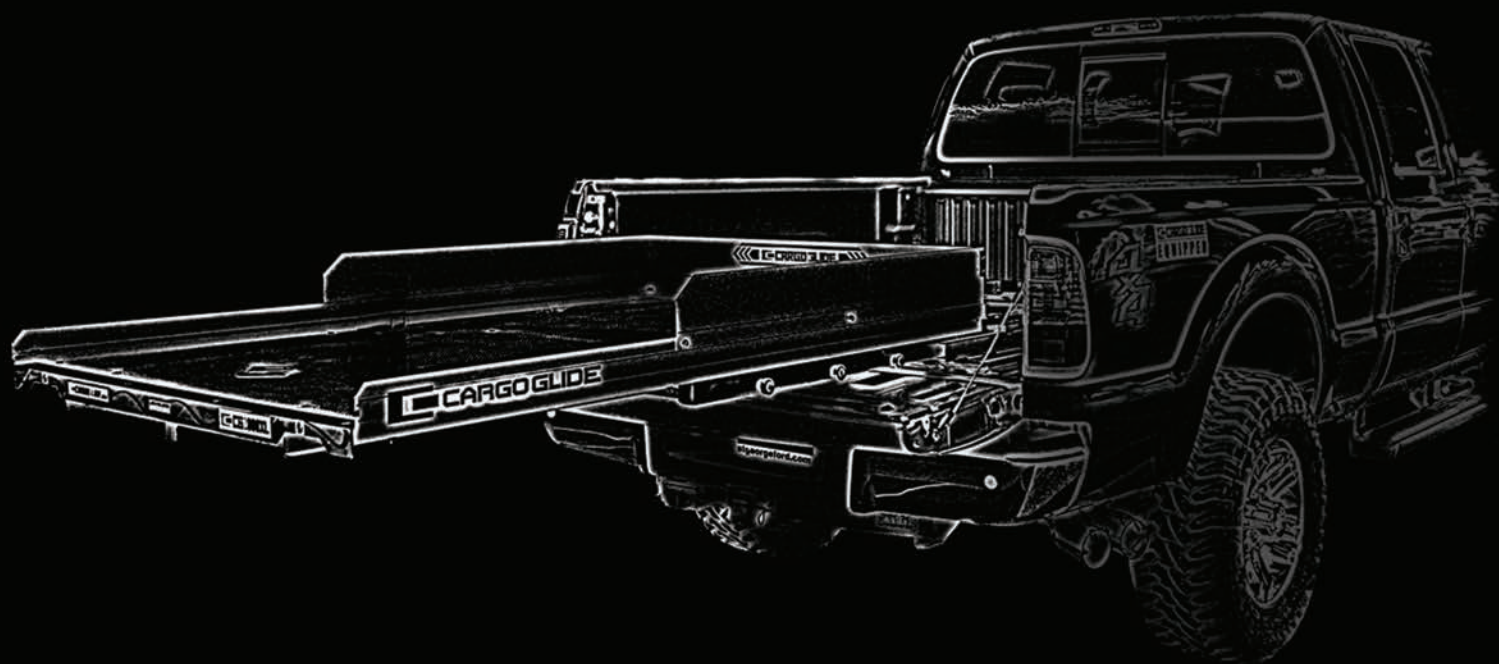

CargoGlide's Commitment to You

It started with a commitment to build a better delivery system. A sliding tray that was American made. Not compromising quality of material, to make a "Pretty" outward appearance. By listening to the needs of our customers not what we thought they would like, we designed a sliding tray with longevity of use and ease of function.

Like our commitment from the start, we pride ourselves on building a safety tool that keeps delivering to you anything you need retrieved, while saving your knees and back. That's what CargoGlide is, the smart persons retrieval system. We are committed to make your life and work easier, smarter, more efficient and safer.


In short our slide was designed & built to help "YOU" work or play more efficiently. It's our commitment to you.

The CargoGlide Family

Table of Contents

Just Look it's only 8 pages



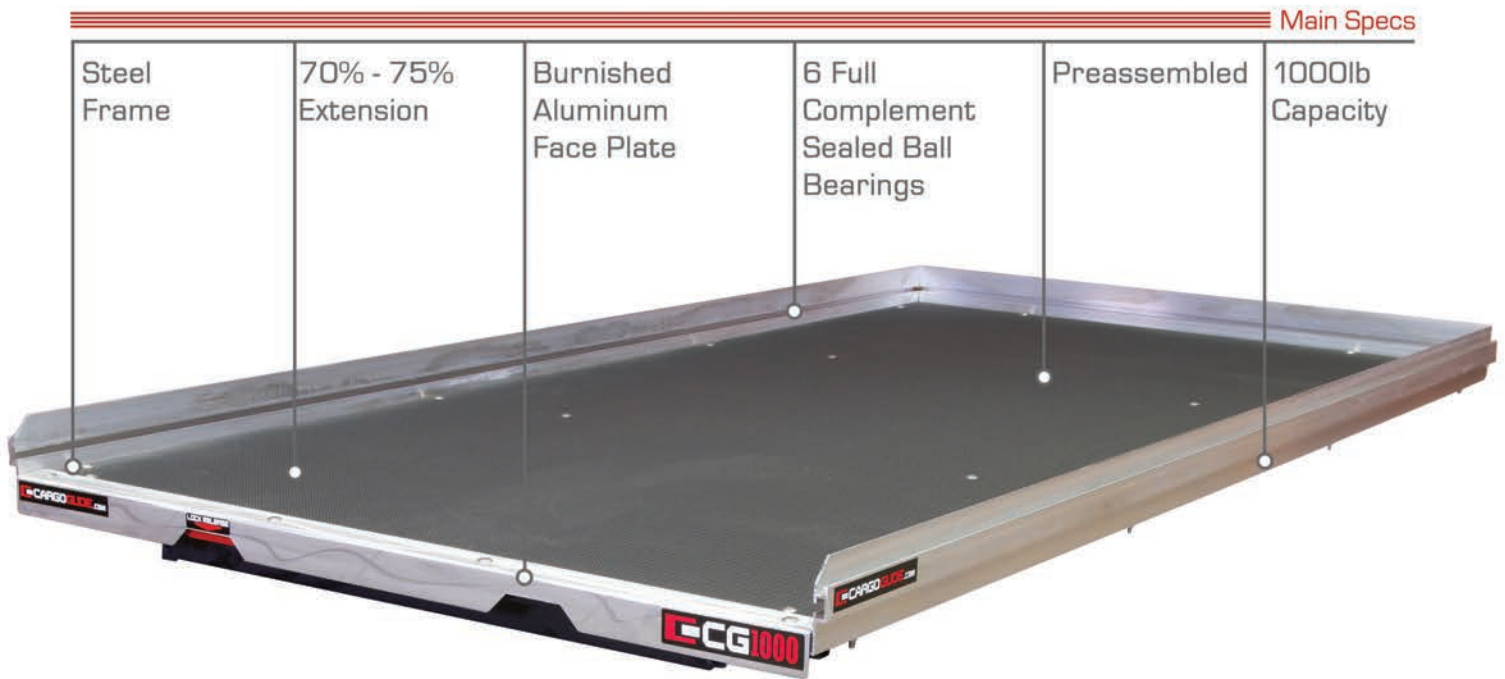

1000 lb capacity. 75% of the Cargo Tray Length Slides Out on short bed trucks and 70% on long beds. Sturdy steel frame construction. Real plywood deck with a laminated surface for strength and durability. 6 Bearings Total, 4 Full Complement Permanently Sealed Ball Bearings and Two Powerful Needle Bearings provide Dependable Lasting support for the Cargo You Haul in Your CargoGlide.

Industrial 4" high extruded 6061-T6 Thick Aluminum Side Rails with a Slot Style infinitely adjustable Tie Down Track around all Three Sides, and includes 4 adjustable marine grade tie down eyebolts to make securing cargo easy and versatile.

CAPACITIES


Payload Distributed Capacity	1000 lbs
Tie-down Load Rating	400 lbs per tie-down
Bearing Load Rating	Combined Load Rating of Bearings = 6350
Load	2 @ 1573 ea.
Carrier	2 @ 1602 ea.
Side-Thrust	2 @ 1573 ea.
Plus-Nut Rating (in. 125 steel)	4 - 6 @ 1500 lbs. each
Extension	70-75%

DIMENSIONS / WEIGHT RANGES

Length	30" - 96"
Width	22" - 48"
Profile/ Deck Height (inches)	3 3/4
Side Rails	4"
Grab Rail	Based on width of unit
Lower Frame Width	19" - 35"
Weight	130 - 175 lbs.

Custom Sizes Available

Main Specs

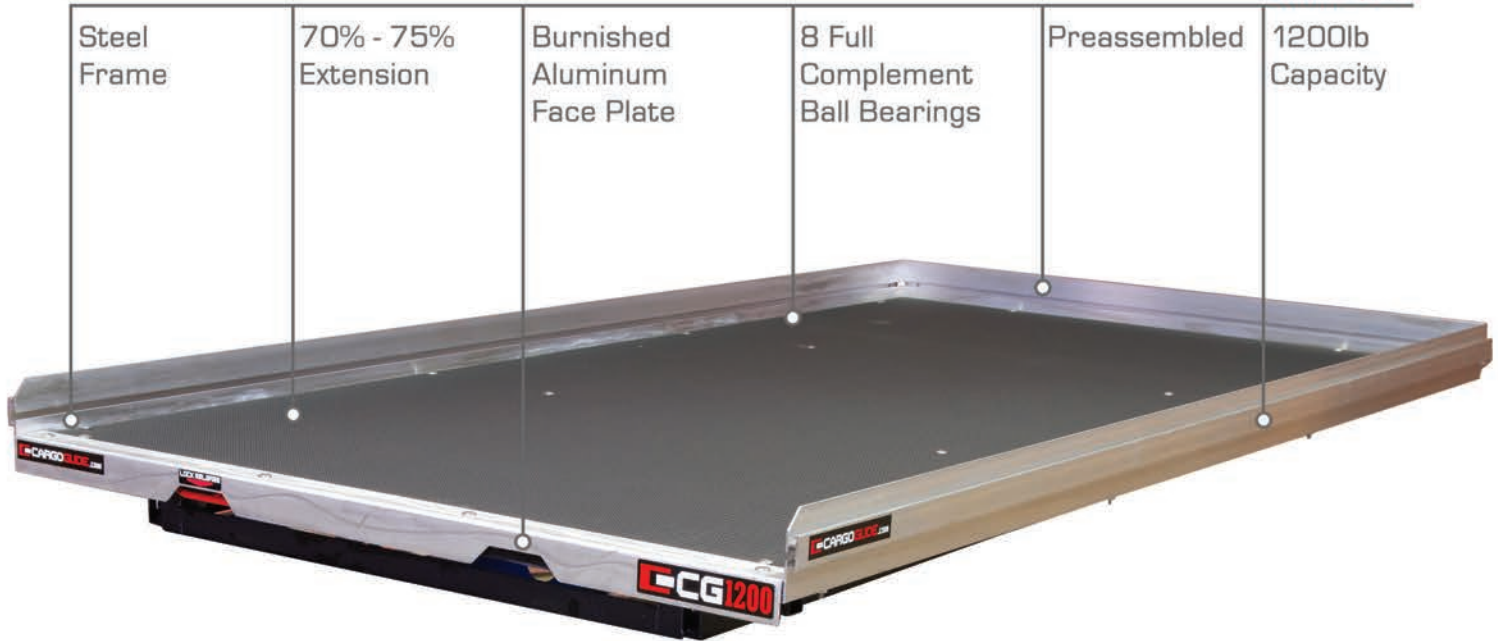

Steel Frame	70% - 75% Extension	Burnished Aluminum Face Plate	8 Full Complement Ball Bearings	Preassembled	1200lb Capacity
-------------	---------------------	-------------------------------	---------------------------------	--------------	-----------------

1200 lb capacity. 75% of the Cargo Tray Length Slides Out on short bed trucks and 70% on long beds. Sturdy steel frame construction. Real plywood deck with a laminated surface for strength and durability. 8 Full Complement Permanently Sealed Ball Bearings provide Dependable Lasting support for the Cargo You Haul in Your CargoGlide.

Industrial 4" high extruded 6061-T6 Thick Aluminum Side Rails with a Slot Style infinitely adjustable Tie Down Track around all Three Sides, and includes 4 adjustable marine grade tie down eyebolts to make securing cargo easy and versatile.

CAPACITIES

Payload Distributed Capacity	1200 lbs
Tie-down Load Rating	400 lbs per tie-down
Bearing Load Rating	Combined Load Rating of Bearings = 15048
Load	2 @ 2508 ea.
Carrier	4 @ 2508 ea.
Side-Thrust	2 @ 1573 ea.
Plus-Nut Rating (in. 125 steel)	4-6 @ 1500 lbs. each
Extension	70% - 75%

DIMENSIONS / WEIGHT RANGES

Length	30" - 96"
Width	22" - 48"
Profile/ Deck Height (inches)	3 3/4"
Side Rails	4"
Grab Rail	Based on width of unit
Lower Frame Width	19" - 35"
Weight	130 - 175 lbs.

Custom Sizes Available



1500 lb capacity. 75% of the Cargo Tray Length Slides Out on short bed trucks and 70% on long beds. Sturdy steel frame construction. Real plywood deck with a laminated surface for strength and durability. 8 Full Complement Permanently Sealed Ball Bearings provide Dependable Lasting support for the Cargo You Haul in Your CargoGlide.

Industrial 4" high extruded 6061-T6 Thick Aluminum Side Rails with a Slot Style infinitely adjustable Tie Down Track around all Three Sides, and includes 4 adjustable marine grade tie down eyebolts to make securing cargo easy and versatile.


CAPACITIES

Payload Distributed Capacity	1500 lbs
Tie-down Load Rating	400 lbs per tie-down
Bearing Load Rating	Combined Load Rating of Bearings = 15048
Load	2 @ 2508 ea.
Carrier	4 @ 2508 ea.
Side-Thrust	2 @ 1573 ea.
Plus-Nut Rating (in. 125 steel)	4 - 6 @ 1500 lbs. each
Extension	70% - 75%

DIMENSIONS / WEIGHT RANGES

Length	30" - 96"
Width	22" - 48"
Profile/ Deck Height (inches)	4 1/4
Side Rails	4"
Grab Rail	Based on width of unit
Lower Frame Width	19.5" - 35 1/2"
Weight	155 - 205 lbs.

Custom Sizes Available

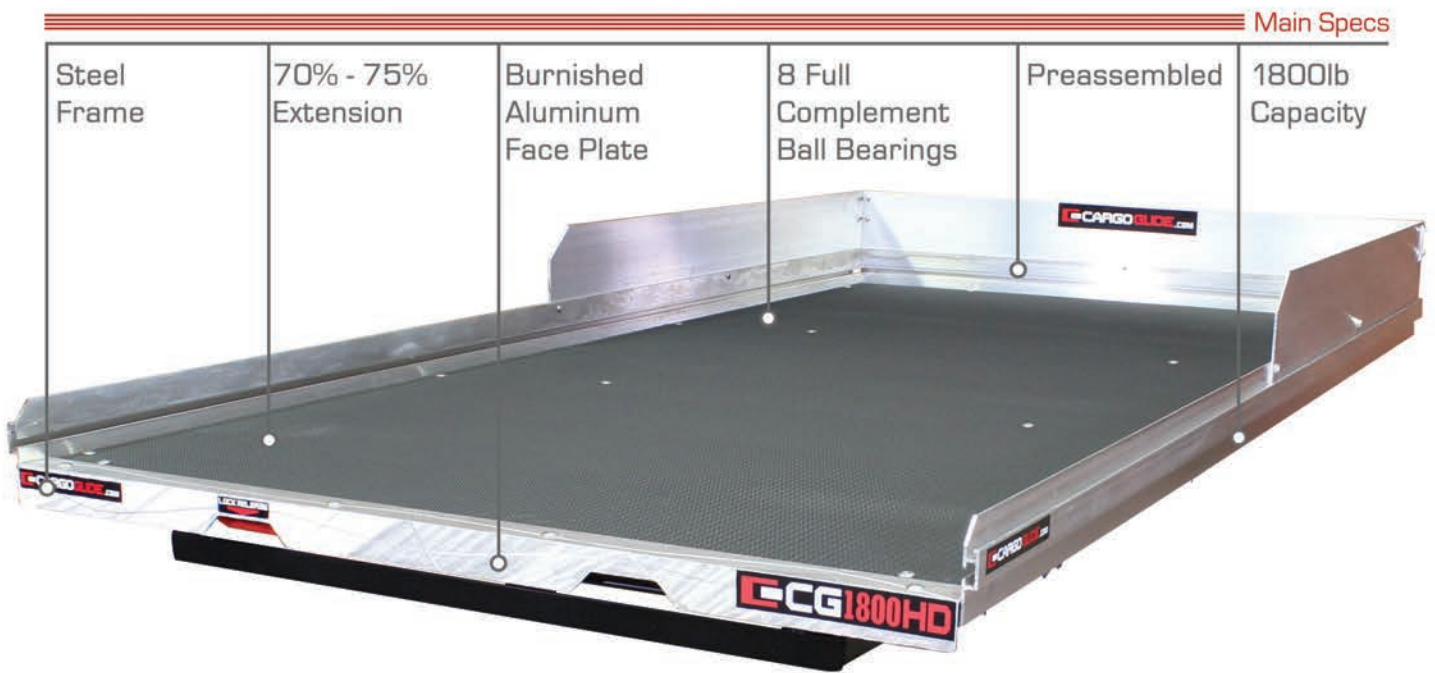

Main Specs

Steel Frame	70% - 75% Extension	Burnished Aluminum Face Plate	8 Full Complement Ball Bearings	Preassembled	1800lb Capacity
-------------	---------------------	-------------------------------	---------------------------------	--------------	-----------------

1800 lb capacity. 75% of the Cargo Tray Length Slides Out on short bed trucks and 70% on long beds. Real plywood deck with a laminated surface for strength and durability. 8 Full Complement Permanently Sealed Ball Bearings provide Dependable Lasting support for the Cargo You Haul in Your CargoGlide.

Industrial 4" high extruded 6061-T6 Thick Aluminum Side Rails with a Slot Style infinitely adjustable Tie Down Track around all Three Sides, and includes 4 adjustable marine grade tie down eyebolts to make securing cargo easy and versatile. Includes 8" High Side Extensions on the first four feet of the rails at the cab end, helps contain more cargo.

CAPACITIES


Payload Distributed Capacity	1800 lbs
Tie-down Load Rating	400 lbs per tie-down
Bearing Load Rating	Combined Load Rating of Bearings = 16070
Load	2 @ 3019 ea.
Carrier	4 @ 2508 ea.
Side-Thrust	2 @ 1573 ea.
Plus-Nut Rating (in. 125 steel)	4 - 6 @ 1500 lbs. each
Extension	70% - 75%

DIMENSIONS / WEIGHT RANGES

Length	30" - 96"
Width	22" - 48"
Profile/ Deck Height (inches)	4 1/4
Side Rails	4" with 8" High Sides
Grab Rail	Based on width of unit
Lower Frame Width	19.5" - 35 1/2"
Weight	155 - 205 lbs.

Custom Sizes Available

Main Specs

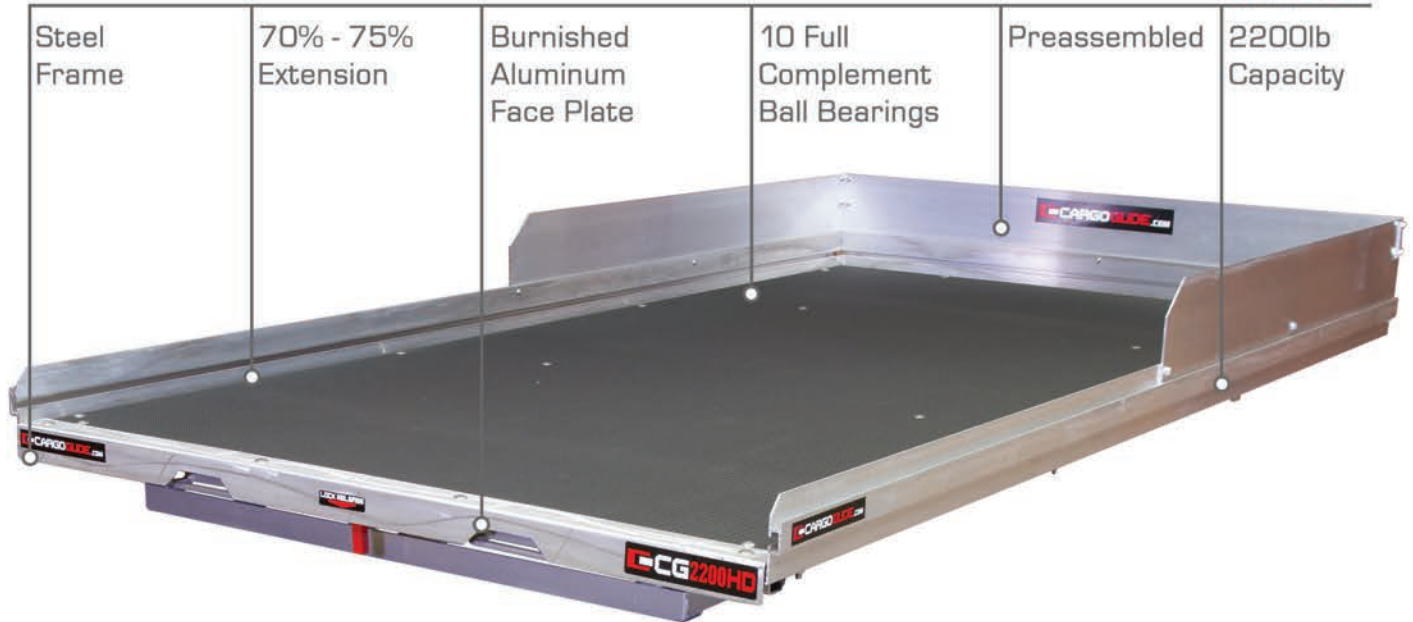

Steel Frame	70% - 75% Extension	Burnished Aluminum Face Plate	10 Full Complement Ball Bearings	Preassembled	2200lb Capacity
-------------	---------------------	-------------------------------	----------------------------------	--------------	-----------------

2200 lb capacity. 75% of the Cargo Tray Length Slides Out on short bed trucks and 70% on long beds. Real plywood deck with a laminated surface for strength and durability. 10 Bearings Total, 4 Full Complement Double Row, 6 Single Row Permanently Sealed Ball Bearings provide Dependable Lasting support for the Cargo You Haul in Your CargoGlide.

Industrial 4" high extruded 6061-T6 Thick Aluminum Side Rails with a Slot Style infinitely adjustable Tie Down Track around all Three Sides, and includes 4 adjustable marine grade tie down eyebolts to make securing cargo easy and versatile. Includes 8" High Side Extensions on the first four feet of the rails at the cab end, helps contain more cargo.

CAPACITIES

Payload Distributed Capacity	2200 lbs
Tie-down Load Rating	400 lbs per tie-down
Bearing Load Rating	Combined Load Rating of Bearings = 22108
Load	4 @ 3019 ea.
Carrier	4 @ 2508 ea.
Side-Thrust	2 @ 1573 ea.
Plus-Nut Rating (in. 125 steel)	4 - 6 @ 1500 lbs. each
Extension	70% - 75%

DIMENSIONS / WEIGHT RANGES

Length	30" - 96"
Width	22" - 48"
Profile/ Deck Height (inches)	4 1/4
Side Rails	4" with 8" High Sides
Grab Rail	Based on width of unit
Lower Frame Width	19.5" - 35 1/2"
Weight	155 - 205 lbs.

Custom Sizes Available

Main Specs

Steel Frame	100% Extension	Burnished Aluminum Face Plate	36 Full Complement Ball Bearings	Preassembled	1500lb Capacity
-------------	----------------	-------------------------------	----------------------------------	--------------	-----------------



1500 lb capacity. 100% of the Cargo Tray Length Slides Out for Total Access to your Cargo. Real plywood deck with a laminated surface for strength and durability. 36 Bearings Total, 4 Full Complement Double Row, 16 Single Row Permanently Sealed Ball Bearings and 2 Cam Follower Sealed Needle Bearings provide Dependable Lasting support for the Cargo You Haul in Your CargoGlide, This slide also has 14 more sealed side thrust bearings that make it slide easier when used on uneven ground.

Powder coated Industrial 4" high extruded 6061-T6 Aluminum Side Rails with a Slot Style infinitely adjustable Tie Down Track around all Three Sides, and includes 4 adjustable marine grade tie down eyebolts to make securing cargo easy and versatile. Includes 8" High Side Extensions on the first four feet of the rails at the cab end, helps contain more cargo.


CAPACITIES

Payload Distributed Capacity	1500 lbs
Tie-down Load Rating	400 lbs per tie-down
Bearing Load Rating	Combined Load Rating of Bearings = 57150
Load	4 @ 3019 ea. / 16 @ 2508 ea.
Carrier	2 @ 2473 ea.
Side-Thrust	14 @ 1573 ea.
Plus-Nut Rating (in. 125 steel)	6 - 8 @ 1500 lbs. each
Extension	100%

DIMENSIONS / WEIGHT RANGES

Length	36" - 96"
Width	22" - 48"
Profile/ Deck Height (inches)	4 3/4
Side Rails	4" with 8" High Sides
Grab Rail	Based on width of unit
Lower Frame Width	24" - 50"
Weight	350 - 430 lbs.

Custom Sizes Available

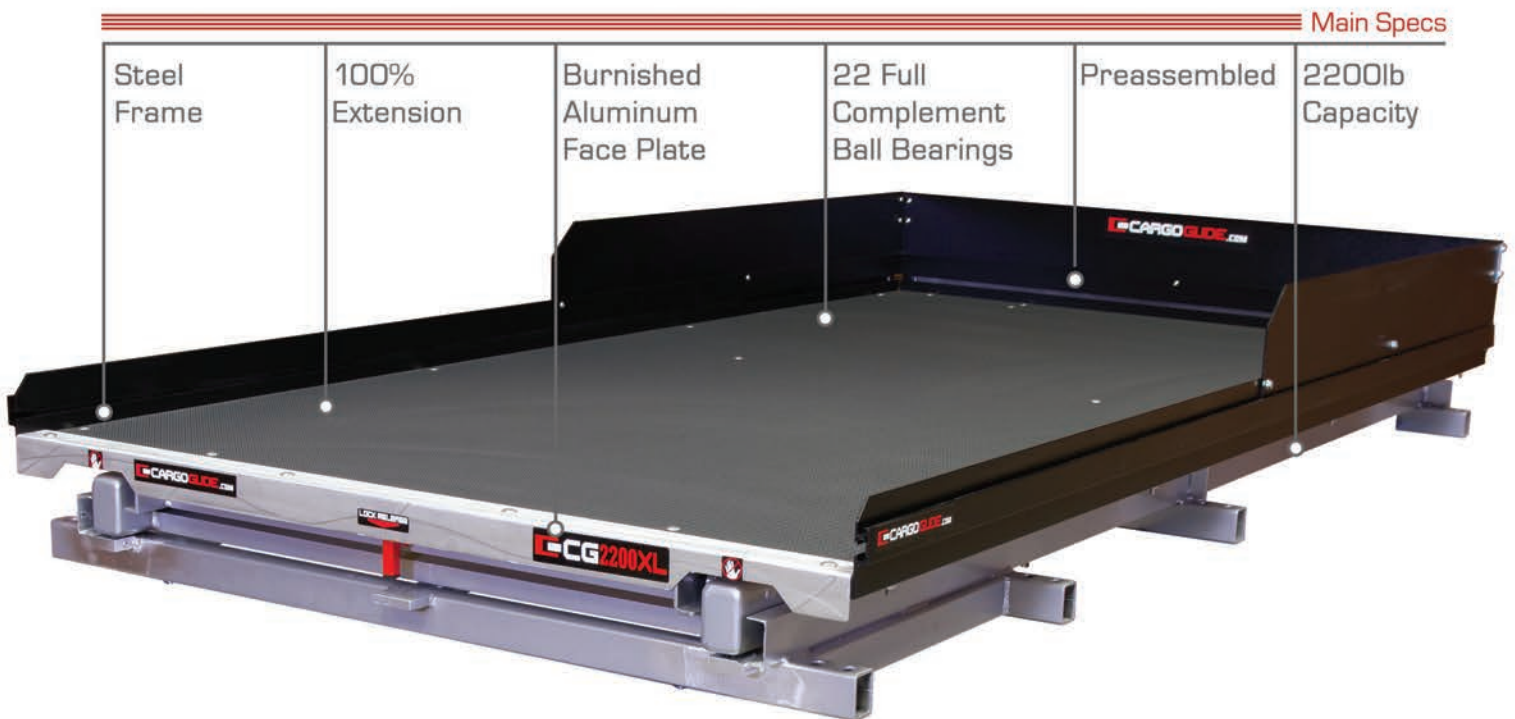

Main Specs

Steel Frame	100% Extension	Burnished Aluminum Face Plate	22 Full Complement Ball Bearings	Preassembled	2200lb Capacity
-------------	----------------	-------------------------------	----------------------------------	--------------	-----------------

2200 lb capacity. 100% of the Cargo Tray Length Slides Out for Total Access to your Cargo. Real plywood deck with a laminated surface for strength and durability. 22 Bearings Total, 2 Full Complement Double Row, 18 Single Row Permanently Sealed Ball Bearings and 2 Cam Follower Sealed Needle Bearings provide Dependable Lasting support for the Cargo You Haul in Your CargoGlide.

Powder coated Industrial 4" high extruded 6061-T6 Aluminum Side Rails with a Slot Style infinitely adjustable Tie Down Track around all Three Sides, and includes 4 adjustable marine grade tie down eyebolts to make securing cargo easy and versatile. Includes 8" High Side Extensions on the first four feet of the rails at the cab end, helps contain more cargo.

CAPACITIES

Payload Distributed Capacity	2200 lbs
Tie-down Load Rating	400 lbs per tie-down
Bearing Load Rating	Combined Load Rating of Bearings = 56128
Load	2 @ 3019 ea. / 18 @ 2508 ea
Carrier	2 @ 2473 ea.
Side-Thrust	N/A
Plus-Nut Rating (in. 125 steel)	6-8 @ 1500 lbs. each
Extension	100%

DIMENSIONS / WEIGHT RANGES

Length	36" - 130"
Width	22" - 48"
Profile/ Deck Height (inches)	5
Side Rails	4" with 8" High Sides
Grab Rail	Based on width of unit
Lower Frame Width	47" Standard
Weight	335 - 448 lbs.

Custom Sizes Available

Main Specs

Steel Frame	70% - 75% Extension	Burnished Aluminum Face Plate	18 Full Complement Ball Bearings	Preassembled	1000lb Capacity
-------------	---------------------	-------------------------------	----------------------------------	--------------	-----------------

Powder coated steel frame, up to 75% extension in single or dual directions, Real plywood deck with laminated surface for strength and durability, 18 Roller Bearings Including Side Thrust Bearings for use flat or sideways. Single or dual directional models available. Perfect for applications such as Vans with 2 side opening doors, RVs, Work Trucks and other applications. Capacities 1000 lbs. 100% Fully Assembled. Custom sizes available

Configuration Options

CG2200HD Gooseneck Modification



CGGN-1

Aluminum Decks



CGALMD - 1, 2

Carpeted Decks



CGCPT

